


Cavity for Screw-in Valve 3-Way Valve

C - ... - 3S

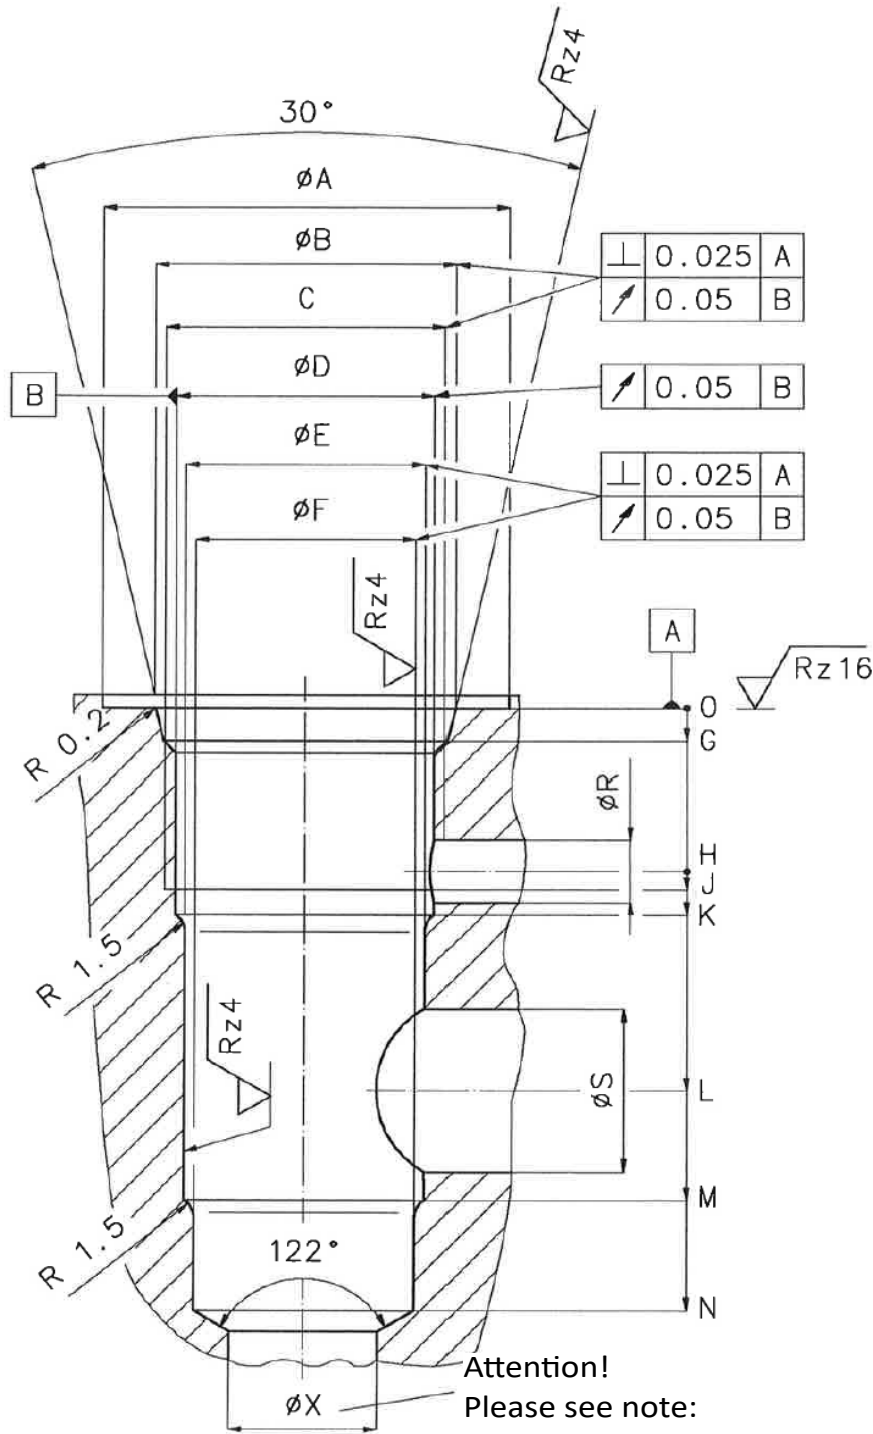

Note:

For the valves POCI-10-0-... (Data Sheet-no.: CC-210-101)
dimension ØX = min. Ø14,5 x 55 applies.

For the valves POCI-12-0-... (Data Sheet-no.: CC-210-121)
dimension ØX = Ø20 x 73 applies.

Type	ØA	±0,05 ØB	C = UNF	+0,05 ØD	+0,025 ØE	+0,025 ØF	G	H	J	K	L	M	N min. true to gauge	ØR max	ØS max.	ØX max.	Single Data Sheet
C-08-3S	30	20,65	UNF 3/4" - 16	17,5	15,9	14,3	2,65	13	13,3	15,3	27,5	32,4	43,5	3	9	13	IK-200-089
C-10-3S	33	24	UNF 7/8" - 14	20,4	19,08	17,5	2,65	13	14,5	16,5	31,5	38,75	49	5	13	14,5	IK-200-109
C-12-3S	40	29,15	UN-2B 1 1/16" - 12	24,8	23,8	22,25	3,5	20	21,5	23,5	41	48,3	61	5	14,5	20,5	IK-200-129
C-16-3S	45	35,6	UNF 1 5/16" - 12	31,3	28,6	25,45	3,5	16,5	17,5	20,5	37,5	46	56	6,5	15,25	19	IK-200-169
C-20-3S	60	43,6	UNF 1 5/8" - 12	39,12	36,55	33,4	3,5	20	21	24	50	64,5	78	6,5	25	30	IK-200-209