


Cavity for Screw-in Valve 2-Way Valve

C-...-2

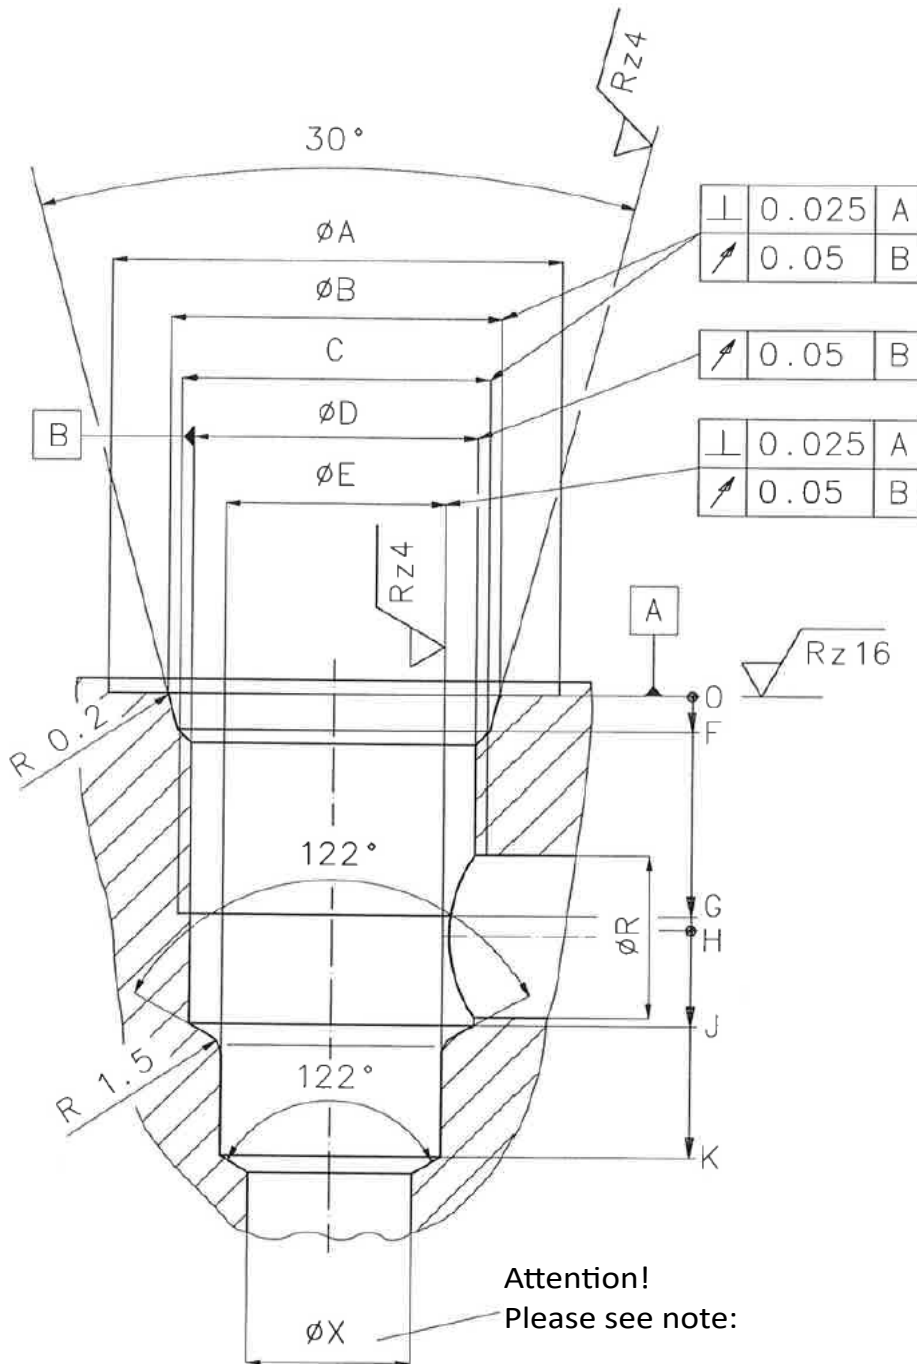

Note:

For the valves EMDV-10.-C3.. (Data Sheet-no.: CS-310-101)
CVRP-10.-... (Data Sheet-no.: CC-160-101)
POCX-10.-... (Data Sheet-no.: CC-240-101)
dimension ØX = min. Ø14,5 x 45 applies.

For the valves CVRP-12.-... (Data Sheet-no.: CC-160-121)
POCX-12.-... (Data Sheet-no.: CC-240-121)
dimension ØX = Ø22 x 60 applies.

Type	ØA	±0,05 ØB	C = UNF	±0,05 ØD	±0,025 ØE	±0,2 F	G	H	J	K min. true to gauge	Ø R max.	Ø X max.	Single Data Sheet
C-04-2	22	12,37	UNF 7/16" - 20	9,8	8,74	2,55	9,53	10	15,5	23,5	6	6	IK-100-049
C-08-2	30	20,65	UNF 3/4" - 16-2B	17,5	12,7	2,65	13	14	19,05	30,5	10	11	IK-100-089
C-10-2	33	24	UNF 7/8" - 14	20,4	15,9	2,65	16	17	22,2	33,5	11,5	14,5	IK-100-109
C-12-2	40	29,15	UN-2B 1 1/16" - 12	24,8	23,8	3,5	19	24	35	46,5	19	22	IK-100-129
C-16-2	45	35,6	UNF 1 5/16" - 12	31,3	28,6	3,5	22,5	24,5	34	47	19	19	IK-100-169
C-20-2	60	43,6	UNF 1 5/8" - 12	39	36,5	3,5	21	31	44,5	59	25	30	IK-100-209